

DATASHEET

E2608

Evikon

Distributed by AKRIBIS





Ammonia Detector-Transmitter E2608-NH3-E




Features

- Wall-mount or duct-mount version
- Industrial IP65 housing
- Two analog outputs settable to 4-20 mA or 0-10 V
- RS485 Modbus RTU digital interface
- Two relays for alarm / ventilation control
- Attached or remote sensor


Specifications

Calibration	Ammonia NH ₃			
Sensor type	Electrochemical			
Sampling method	Diffusion			
Detection ranges, ppm	0...100	0...300	0...1000	0...5 000
Maximum overload, ppm	200	500	1500	10 000
Response time T90, s	< 75	< 75	< 75	< 120
Resolution, ppm	1			
Signal update	Every 1 second			
Sensor lifetime	> 2 years			
Maintenance interval	6 months			
Self-diagnostics	Full functionality check at start-up			
Warm-up time	≤ 1 min			
Power supply	12...36 VDC (default), 24 VAC or 230 VAC as options			
Power consumption	< 2 VA			
Digital interface	RS485, Modbus RTU protocol			
Analog outputs	2 × 4-20 mA / 0-10 V, user settable			
Output scale width	Recommended: 20-100% of the range; > 10 × resolution in any case			
Output relays	2 × SPST relays (closing contact), 250 VAC / 30 VDC, 5 A max			
Default alarm setpoints	For 0...100 ppm range: RE1 (LOW): set 25; release 20 ppm RE2 (HIGH): set 35; release 28 ppm For other ranges: defined by user within 5-95% of the detection range			
Enclosure	Grey ABS plastic, wall mount, protection class IP65			
Dimensions	H87 × W82 × D55 mm			
Remote sensor probe	Protection IP65, shielded cable default cable length 3.0 m			
Operating environment	Industrial indoor and outdoor locations			
Operating conditions	-40...+50°C, -30...+50°C (for 0...5 000 ppm), 15...90 %RH non-condensing; 0,9...1,1 atm; Explosion-safe areas; Non-aggressive atmosphere			
	NOTE! The device is not suitable for areas with constantly high ammonia concentration.			
	NOTE! We offer technical solutions for extreme humidity, please ask for more information.			


Wall mount version

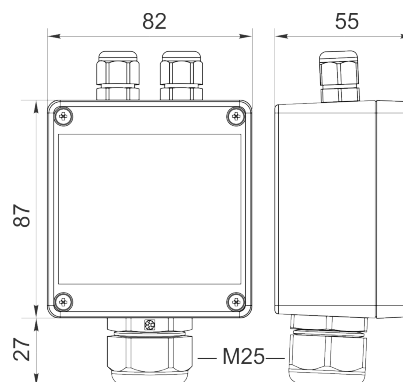


Duct mount version

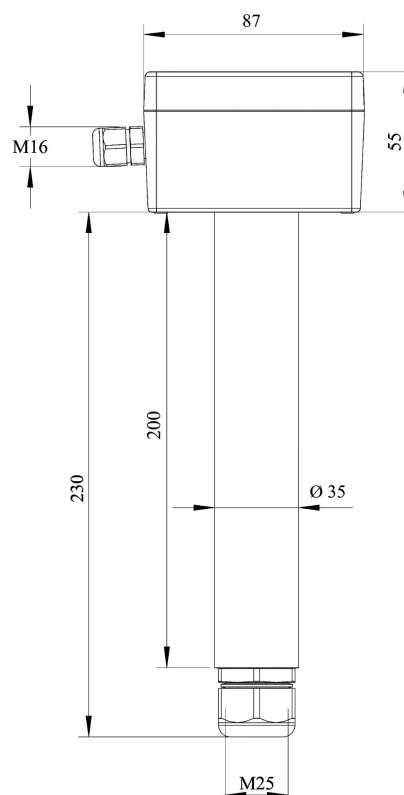

Connection diagrams

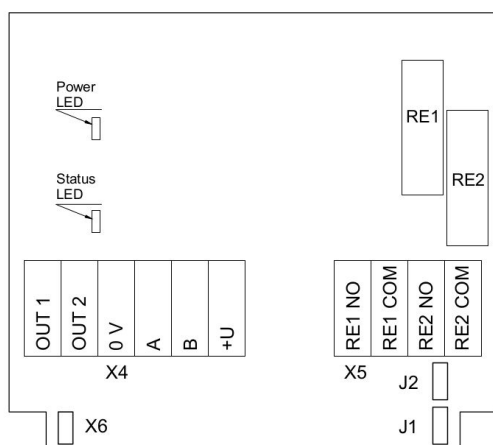

Version without PSU

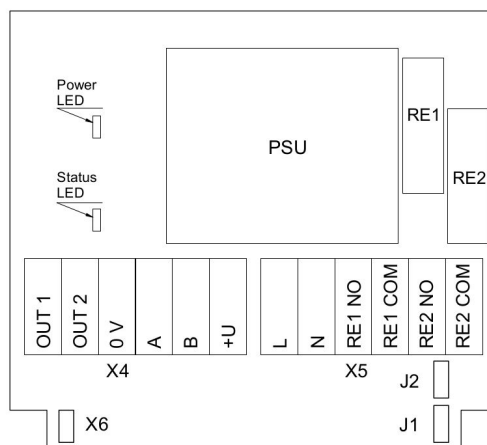

Version with PSU

Jumpers

J1

OUT1 type (open: 4-20 mA; closed 0-10 V)

J2

OUT2 type (open: 4-20 mA; closed 0-10 V)

X6

Reset Modbus network parameters to default

X4 terminals

OUT1

4-20 mA / 0-10 V output

OUT2

4-20 mA / 0-10 V output

0V

0 V / 24 VAC Neutral (optional)

A

RS485 A / Data +

B

RS485 B / Data -

+U

+24 VDC / 24 VAC Phase (optional)

X5 terminals (optional)

L

90...265 VAC Phase

N

90...265 VAC Neutral

RE1 NO

Relay 1, normally open terminal

RE1 COM

Relay 1, common terminal


RE2 NO

Relay 2, normally open terminal


RE2 COM

Relay 2, common terminal

Remote probe

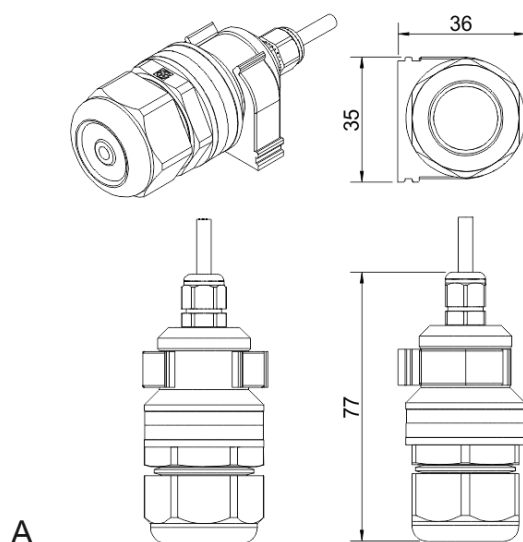

A

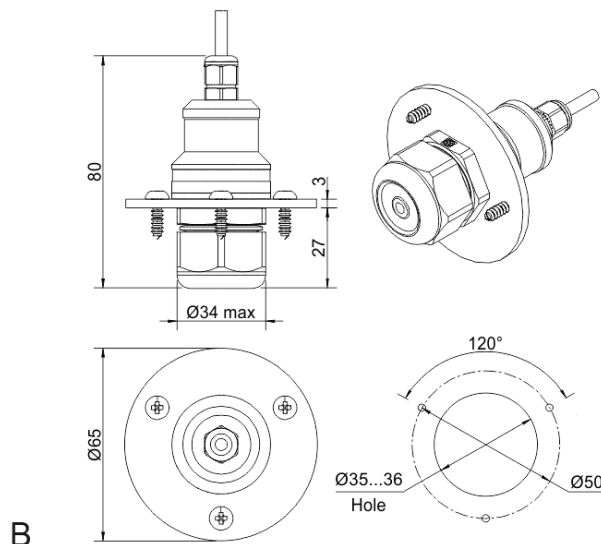

B

Wall mount remote probe with fixing clamp (default version)

Remote probe with rubber flange and three self-tapping screws (on request)

