



BROCHURE

# LTI-WM-WiFi

LogTag

Distributed by AKRIBIS



UPLOAD DATA IN REAL TIME VIA WIFI



**LogTag**®

AKRIBIS · [www.akribis.info](http://www.akribis.info) · [contacto@akribis.info](mailto:contacto@akribis.info)

**LTI-WM-WIFI**  
Real-Time Wall Mounted  
WiFi Interface Cradle



The new LogTag® LTI-WM-WiFi is a high-speed interface device that connects TREX/TREL/TRED data loggers to your WiFi network for real-time data upload to a Cloud-based online environmental management system platform, LogTag Online.

The LogTag® LTI-WM-WiFi uploads data in real time without access to a computer and installed software. The data is immediately available to authorized stakeholders in LogTag Online.

\*TRED30-16R and glycol buffer in the image sold separately

# Features



Real-time data automatically uploaded via WiFi to the LogTag Online cloud.



Easily set up to work with your WiFi network.



Connects to LogTag Online, a cloud server solution for viewing, analyzing and storing data.



If the WiFi network is temporarily unavailable, downloaded data is stored in the LTI-WM- WiFi's buffer memory.



Downloaded data is fully encrypted and automatically uploaded to a secure LogTag cloud server.



Inbuilt LED indicators show data download and network access status.

# Applications




*Medical & Healthcare*




*Clinics / Laboratories*



*Vaccines*

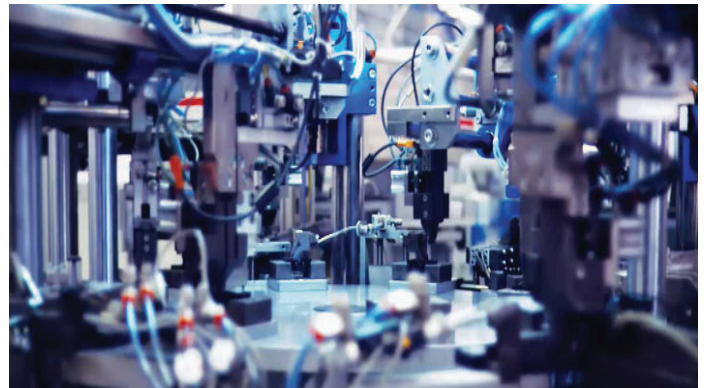

*Industrial*

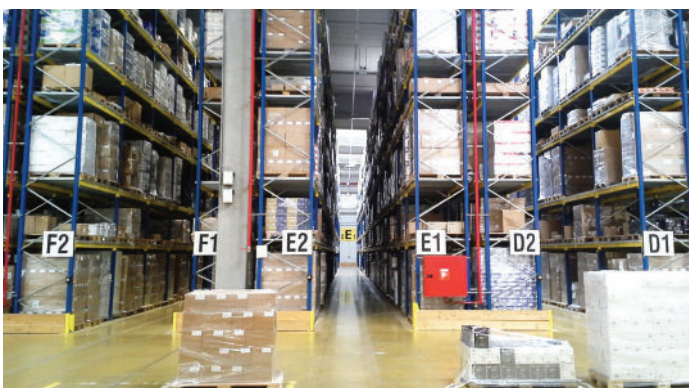

*Warehouse*



*Indoor Spaces*

# Specifications

|                             |                                                          |
|-----------------------------|----------------------------------------------------------|
| Product Model               | LTI-WM-WiFi                                              |
| Operating Temperature Range | -25°C to +40°C                                           |
| Storage Temperature Range   | -40°C to +70°C                                           |
| USB Standard                | 2.0                                                      |
| Logger buffer               | Up to 45 logger downloads can be buffered                |
| WiFi                        | 2.4GHz 802.11 b/g/n<br>High sensitivity internal antenna |
| Network Security            | WPA/WPA2-PSK                                             |
| Environmental               | IP50 (Rated for inside use only)                         |
| Power Source                | 5V (Computer or USB wall charger)                        |
| Size                        | (W)70mm (H)114mm (D)38mm                                 |
| Weight                      | 100g                                                     |
| Case Material               | ABS                                                      |
| Connectors                  | USB Micro                                                |
| Certifications              | FCC, CE & RoHS Compliant                                 |
| Range (Clear Line of Sight) | 40m                                                      |
| Accessories                 | 2.0m USB cable                                           |



# Connection Software

Real-time data automatically uploaded via WiFi to the LogTag Online cloud.

For more information on LogTag Online, please visit our website:

[logtagrecorders.com/online](http://logtagrecorders.com/online)

