akribis

DATA SHEET

T

Produal

Distributed by AKRIBIS



T120 TRANSFORMER


T120 transformer is used to transform 230 Vac voltage to 24 Vac voltage. The transformer primary and secondary coils are separated by a double insulation (earth connection not required).


The transformer has overload and short circuit protection on primary circuit with a resettable over-current protection (0,7 A).

Housing is made from impact resistant, self-extinguishing thermoplastics.


The transformer is suitable for installations such as monitoring systems, temperature control, lighting and alarms.

Wiring and dimensions:

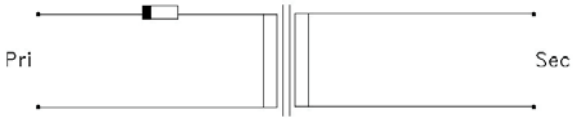

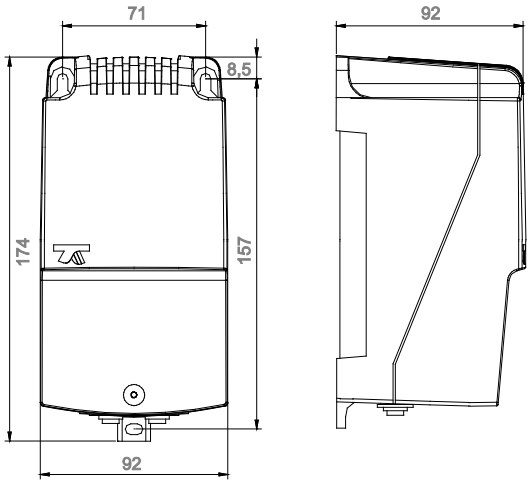

Load diagram:

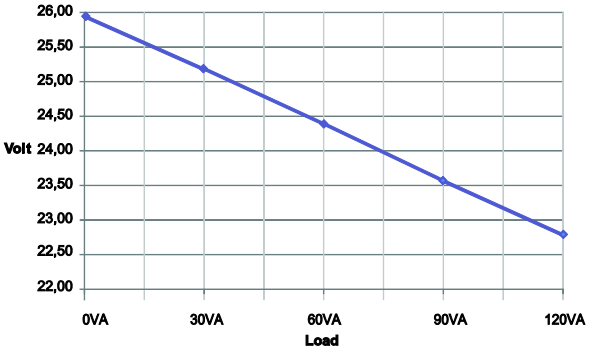



Technical data:

Supply	230 Vac, 50…60 Hz (N – L)
Output	24 Vac, 120 VA
Insulation class	4,2 kV
Primary connector	screw terminal
Secondary connector	screw terminal
Ambient temperature	max. 40 °C
Housing	plastic, IP54
Weight	2,0 kg
Mounting	with screws
Dimensions (w x h x d)	92 x 174 x 92 mm

Ordering guide:

Model	Product number	Description
T120	1184140	transformer

Products fullfil the requirements of directive 2004/108/EC and are in accordance with the following standards.
Emission: EN61000-6-3, EN61000-6-4, IEC 62041. Immunity: EN61000-6-1, EN61000-6-2, IEC 62042. Security: EN 61558-1; EN 61558-2-6

Information is subject to change without prior notice.