akribis

DATA SHEET

TEK LU

Produal

Distributed by AKRIBIS



TEK LU – Duct temperature transmitter



TEK LU 3-wire temperature transmitters measure duct temperatures in automated ventilation systems. They can transmit temperature measurement data to the building management system or operate as controllers. In the controller mode, the transmitter can control a thermal actuator or other device based on the measurement data.

The transmitter measures the temperature with a Pt 1000 sensor element. The transmitter converts the resistance data from the sensor element into a 0...10 V signal. You can select the temperature measurement range during commissioning.

The transmitter is mounted to the ventilation duct with an adjustable duct flange that allows easy installation and accurate depth adjustment for both round and rectangular ducts. The advanced design of the duct flange minimises air leaks in the duct.

You can commission the transmitter with the ML-SER commissioning tool. With the commissioning tool, you can do the following:

- Convert the temperature output into a control output and configure the controller settings.
- Select the output range.
- Tune temperature measurement on the field using the one-point tuning method.
- Change other transmitter settings.


Technical specifications

Property	Value
Supply	24 Vac/dc (22...30 V), < 1 VA
Temperature measurement	
Sensor	Pt1000 EN 60751B
Measurement range	0...50 °C / *0...100 °C / -50...50 °C / -50...150 °C
Accuracy (50 °C)	±0.5 °C
Output	0...10 Vdc, < 2 mA (temperature or controller)
Appliance class (IEC 60664-1)	III

Property	Value
Commissioning tool	ML-SER
Display (-N model)	3.5-digit LCD, resolution 0.1 °C
Operating conditions	
Temperature	0...60 °C
Humidity	0...90 %rH (non-condensing)
Wiring terminals	
Type	tilted screw terminals
Recommended wire	0.2...1.5 mm² (24...16 AWG), stripping length 5 mm
Tightening torque	0.6 Nm
Probe	
Material	stainless steel (AISI 316)
Dimensions	Ø 8 mm x 200 mm (TEK LU, TEK LU-N) Ø 8 mm x 300 mm (TEK LU-300)
Housing	
Protection class	IP54, cable gland or probe downwards
Materials	PC and PBT plastic
Cable gland	M16
Duct flange	
Materials	LLPDP
Mounting	with the duct flange, probe immersion length adjustable: 100...180 mm (probe length 200 mm) 150...280 mm (probe length 300 mm)
Dimensions (w x h x d)	70 x 95 x 291 mm (probe length 200 mm) 70 x 95 x 391 mm (probe length 300 mm)
CE UKCA	Refer to the EU Declaration of Conformity or the UK Declaration of Conformity for compliance information. You can find the declarations on this product's page at www.produal.com.
	* factory setting

Temperature measurement range selection

CAUTION: Make sure that the device is de-energised before changing the jumper settings. Do not remove the cover when the supply voltage is connected.

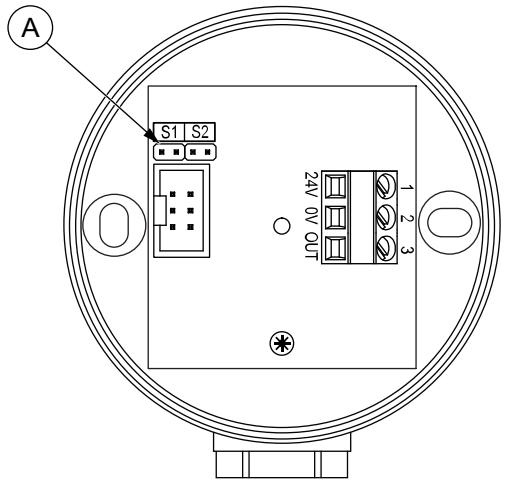

A. Measurement range selection jumpers

	0...50 °C	*0...100 °C	-50...50 °C	-50...150 °C
S1	■	■	• •	• •
S2	• •	■	■	• •


* factory default

Wiring

WARNING: Device wiring and commissioning can only be carried out by qualified professionals. Always make the device wirings in de-energised electricity network.

WARNING: This product is appliance class III product according to IEC 60664-1. The product may only be connected to SELV (separated extra low voltage) electricity network.

CAUTION: The product may only be connected to overvoltage category I, II or III electricity network according to IEC 60664-1.

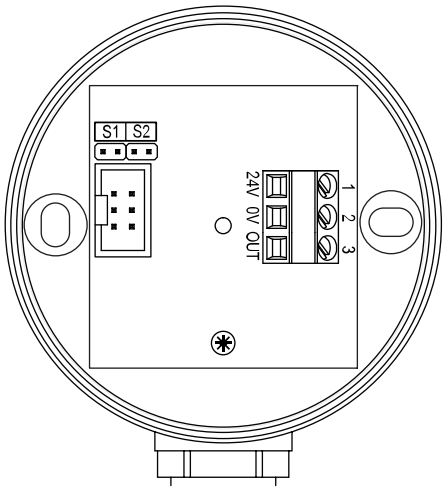

24 V	Supply, 24 Vac/dc, < 1 VA
0V	0 V
OUT	Voltage output (temperature or controller), 0...10 / 2...10 / 0...5 Vdc, < 2 mA

The nominal tightening torque for wire terminal screws is 0.6 Nm.

Important: Do not use excessive force when you tighten the wiring terminal screws.


CAUTION: Ensure that all covers are closed before you connect the supply voltage to the product. Do not remove the covers when the supply voltage is connected.

Ordering information

	Model	Product number	Description
	TEK LU	1179040	Duct temperature transmitter, 0...10 V, probe length 200 mm
	TEK LU-N	1179040N00	Duct temperature transmitter, display, 0...10 V, probe length 200 mm
	TEK LU-300	1179041	Duct temperature transmitter, 0...10 V, probe length 300 mm
	ML-SER	1139010	Transmitter commissioning tool

Dimensions

All dimensions are in millimeters (mm).

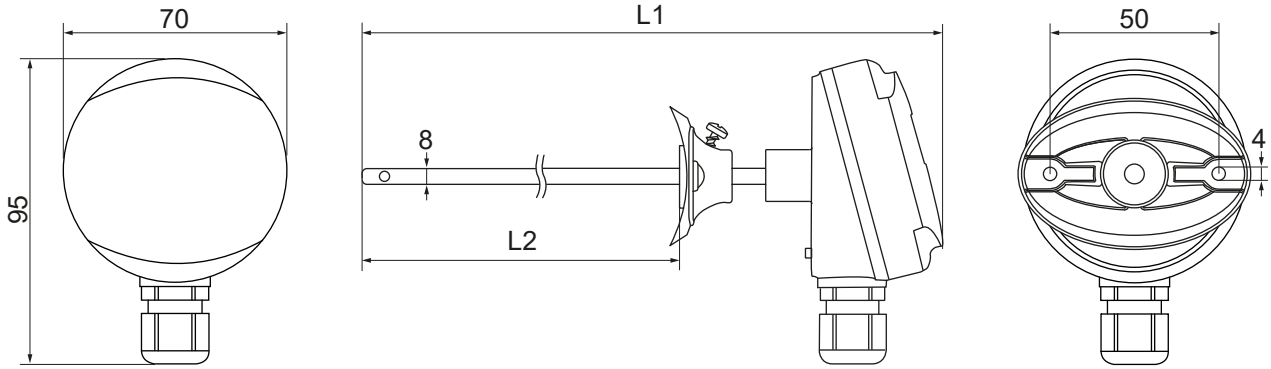

Model	L_1	L_2
TEK LU, TEK LU-N	*291*	*100...180*
TEK LU-300	*391*	*150...280*