BROCHURE

TREL30-16

LogTag

Distributed by AKRIBIS

TEMPERATURE MONITORING AT A GLANCE

LogTag®

TREL30-16CP

Smart Probe Capable

AKRIBIS · www.akribis.info · contacto@akribis.info

The LogTag® TREL30-16CP is the Smart Probe ready iteration of the LogTag® TREL30-16R.

When paired with the compatible LogTag® CP11S Smart Probe, you remove the need to relocate or return the LogTag® TREL30-16CP temperature recorder for calibration, ensuring continuous and uninterrupted logging.

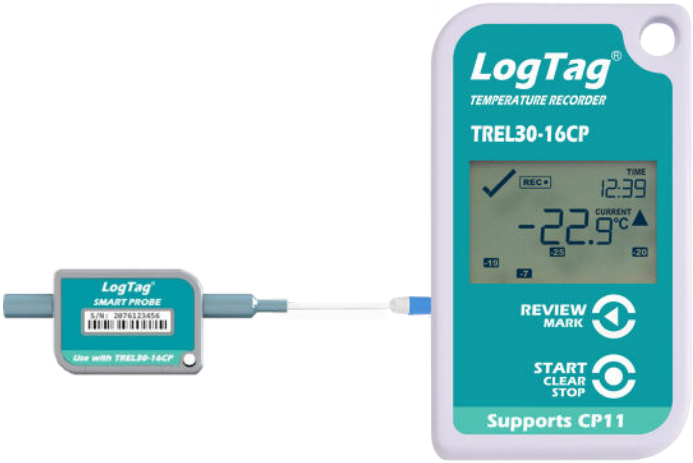

The LogTag® TREL30-16CP temperature recorder measures and stores up to 15,900 temperature readings in temperature environments ranging from -90 °C to +40 °C (-130 °F to +104 °F). Measurement range from either a Smart Probe or Traditional Probe.

Accessories



Wall Mount
Not Included - Optional
Order Code: WMB-01

Glycol Buffer
Not Included - Optional
Order Code: Glycol Buffer-70ml



LTI-WM-WiFi
Not Included
Order Code: LTI-WM-WiFi

LTI-HID
Not Included - Required
Order Code: LTI-HID

Smart Probe
Not Included (**Recommended**)

Compatible Smart Probes:

Order Code	Exposed Tip Length	Tip Diameter	Length Cable
CP11S-15	22.5mm	ø5mm	1.5m (4'11")
CP11S-30	22.5mm	ø5mm	3m (9'10")

OR

External Probe
Not Included

Popular Compatible Probes:

Order Code	Exposed Tip Length	Tip Diameter	Length Cable
ST10S-15	22.5mm	ø5mm	1.5m (4'11")
ST10S-30	22.5mm	ø5mm	3m (9'10")
ST10M-15	60mm	ø5mm	1.5m (4'11")

For more compatible probes, scan the QR code to download the External Probe Brochure

https://lt.help/16ubp

Features

The LogTag® TREL30-16CP is fully compatible with the LogTag® CP11S Smart Probe

Temperature recording range of -90 °C to +40 °C

Stores up to 15,900 temperature recordings, enough memory to log for 66 days at 6 minute logging intervals

Inspections can be recorded at the push of a button

Comprehensive customization options including alarm settings, sample interval and trip duration

Built-in audible alarm

Auto-pause function - unplugging the external probe automatically suspends alarm and statistics processing

Interchangeable External Probe with high quality gold plated connector

User replaceable coin cell battery

Rapid configuration and download

Applications

Healthcare

Pharmaceuticals

Transportation

Cold Room

Produce

Blood and Organ Transport

Indoor Space

HVAC

Specifications

Product Model	TREL30-16CP (Replaceable Battery)
External Temperature Sensor Measurement Range	-90 °C to +40 °C (-130 °F to +104 °F)
Operating Temperature Range	-30 °C to +60 °C (-22 °F to +140 °F)
Storage Temperature Range	-10 °C to +40 °C (+14 °F to +104 °F)
Rated Temperature Reading Accuracy	Better than ±0.5 °C for -20 °C to +10 °C (-4 °F to +50 °F) Better than ±0.7 °C for -50 °C to -20 °C (-58 °F to -4 °F) Better than ±0.7 °C for +10 °C to +30 °C (+50 °F to +86 °F) Better than ±1.0 °C for -80 °C to -50 °C (-112 °F to -58 °F) Better than ±1.0 °C for +30 °C to +40 °C (+86 °F to +104 °F) Better than ±1.8 °C for -90 °C to -80 °C (-130 °F to -112 °F) Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration When used with the CP11 Smart Probe refer to CP11 data sheet for accuracy reading
Rated Temperature Reading Resolution	0.1 °C (0.2 °F) for measurements -80 °C to 0 °C (-112 °F to +32 °F) 0.2 °C (0.4 °F) for measurements 0 °C to +18 °C (+32 °F to +64.4 °F) 0.2 °C (0.4 °F) for measurements –90 °C to –80 °C (–130 °F to –112 °F) 0.3 °C (0.5 °F) for measurements +18 °C to +30 °C (+64.4 °F to +86 °F) 0.5 °C (0.9 °F) for measurements +30 °C to +40 °C (+86 °F to +104 °F) LogTag Analyzer® currently displays to one decimal place of °C or °F. The native resolution is what is stored in the LogTag®
Recording Capacity	15,905 temperature readings 66 days @ 6 minute logging Day summary statistics memory (for display on LCD): up for 30 days of Max/Min/duration and alarm trigger statistics
Sampling Interval	Configurable from 30 seconds to hourly
Logging Start Options	Push button start or specific date and time. Optional start delay of up to 18 hours
Recording Indication	State indicator “REC”
Download Time	Typically less than 10 seconds for full memory (15,905 readings), depending on computer or readout device used
Environmental	IP61 (when vertically mounted or hung)
Power Source	3V CR2032 ($LiMnO_2$) coin cell battery, user replaceable
Battery Life	Storage life of 1 year before ‘start’ (if it is hibernation mode), followed by 1 year of operation with normal use (6 minute logging, statistics reviewed on the display no more than once daily for no longer than 30 seconds each time, download data monthly) NOTE: Continual activation of the audible alarm will reduce the working life of the battery. When an alarm is triggered, the alarm should be cleared and reset as soon as possible
Real Time Clock	Built-in real time clock Rated accuracy ±25ppm @ 25 °C (equivalent to 2.5 seconds/day) Rated temperature coefficient is -0.034 ±0.006ppm/°C (i.e. typically +/- 0.00294 seconds/day/°C).
Standard External Probe Cable Lengths	Standard: 1.5m (4’11”). Extended: 3m (9’10”) (recommended maximum).
Remote External Probe Type	PTFE (FDA food contact rated) coaxial
Size	93mm(H) x 54.5mm(W) x 8.6mm(T)
Weight	43g without External Probe
Case Material	Polycarbonate

© Copyright 2026 LogTag® North America Inc. All rights reserved.
LogTag® North America Inc. reserves the right to change this document without notice.
LogTag® and the distinctive shape of all LogTag® data loggers are registered trademarks of LogTag North America Inc.