


GUIDE

TREL30-16U

LogTag

Distributed by AKRIBIS

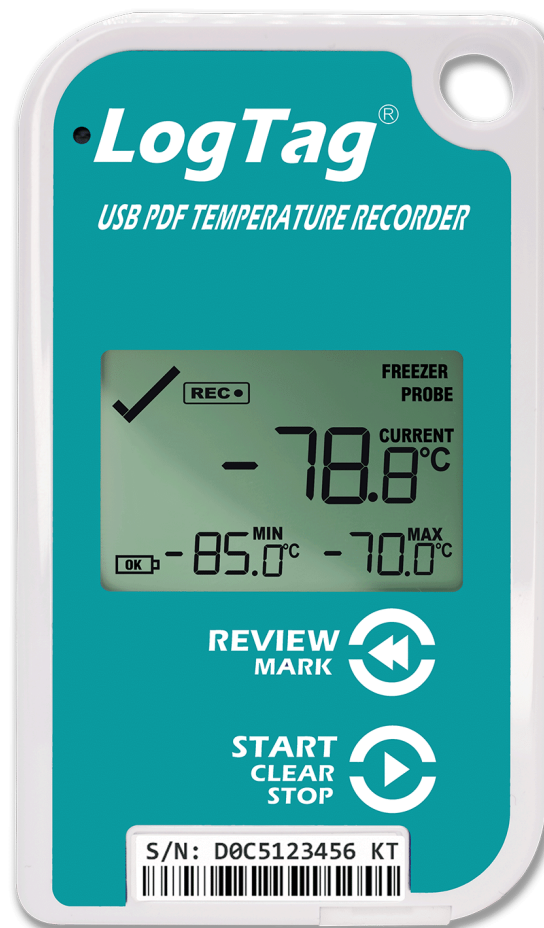

PRIMER GUIDE


This guide helps you transition to the new TREL30-16U logger with clear instructions for achieving the same results as the TREL30-16—easier and faster. We're here to support you in integrating these upgrades into your workflow. Let's explore the new features and how they can enhance your sensitive samples monitoring practices.

CONFIGURATION

Setting up the TREL30-16U couldn't be easier. Loggers come preconfigured from the factory with fridge settings, so it is ready to use* out of the box! If you require different temperature settings, these can be configured through LogTag® Analyzer just as the other TREL30-16 devices are configured.

The TREL30-16U has been designed to remove the requirement for software so you can get started faster.

*Time may need to be adjusted on first use.

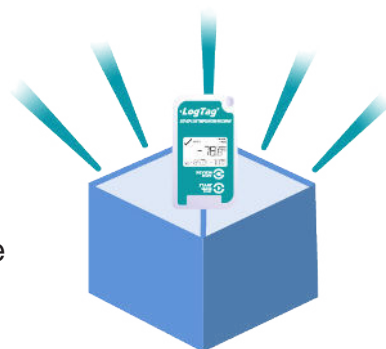

DOWNLOADING DATA



Retrieving data just got simpler. The TREL30-16U now comes with an integrated USB-C port so no software is needed to retrieve the PDF or CSV reports.

Simply open the protective cover to unveil the connection port, plug a USB-C cable into the logger, connect the cable to your PC, then drag and drop your reports to your preferred folder, ready for sharing.


If you like using your LTI-HID Interface, you can continue to do so as the TREL30-16U also has a three pin connection, but it is no longer required.

60 DAY REVIEW

The information displayed on the screen has been simplified to provide an easy review of key information at a glance, now including daily Minimum and Maximum temperature values.

To review the last 60 days temperatures, press the  REVIEW/MARK button to pause the recording and start REVIEW mode. You will see the Maximum temperature for the current day, and if there has been a temperature excursion, the duration of that excursion.

Pressing the  REVIEW/MARK button again will display the Minimum temperature recorded for the current day. Continue to press the REVIEW/MARK button to cycle through the recorded data up to 60 days of recordings.

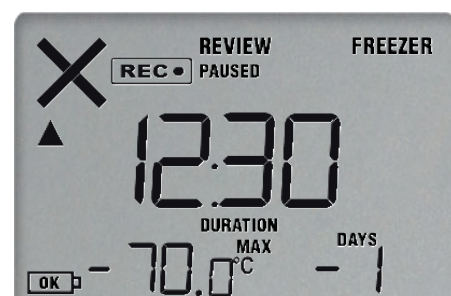

ACCESSORY COMPATIBILITY

The TREL30-16U is designed to work seamlessly with all your existing accessories, making the transition smooth and easy.

While the TREL30-16U does have a new compatibility requirement with the CP10S Smart Probe, rest assured that the usability remains the same.

