akribis

DATASHEET

Vertex liquid particle counters

Lighthouse

Distributed by AKRIBIS



Vertex100

Liquid Particle Counter

Vertex100 sets a new industry benchmark as the most compact liquid particle counter available, boasting an exceptional sensitivity level of 100 nanometers.

Engineered with cutting-edge technology **Vertex100** is a testament to innovation

The **Vertex100**'s sophisticated ethernet TCP/IP interface is designed for effortless connectivity, enabling direct integration into corporate Ethernet LANs as well as compatibility with various facility monitoring systems, thereby facilitating a versatile and connected environment.

Features

- Channel sizes: 100nm, 200nm, 300nm, 500nm
- Two or Four channels of simultaneous count data
- 100 mL per minute flow rate
- Built-in 3.5" color touch screen display
- Leak detection sensor
- 316L stainless steel construction
- Ethernet, RS485 Modbus Serial, 4-20mA
- NEMA style enclosure
- Integrated manual flow control
- 2 Year Warranty



golighthouse.com
info@golighthouse.com

LIGHTHOUSE WORLDWIDE SOLUTIONS


(Toll-free) 1 800 945 5905
(International) +1 541 770 5905

AKBIBIS www.akbibis.info contacto@akbibis.info
©2025 Lighthouse Worldwide Solutions. All rights reserved. Lighthouse Worldwide Solutions (LWS) is based in White City, Oregon, USA with offices and service centers worldwide. LWS reserves the right to change specifications without notice. For more information, visit **golighthouse.com**.

DOCUMENT VERSION 2.0.1

Vertex100

Liquid Particle Counter

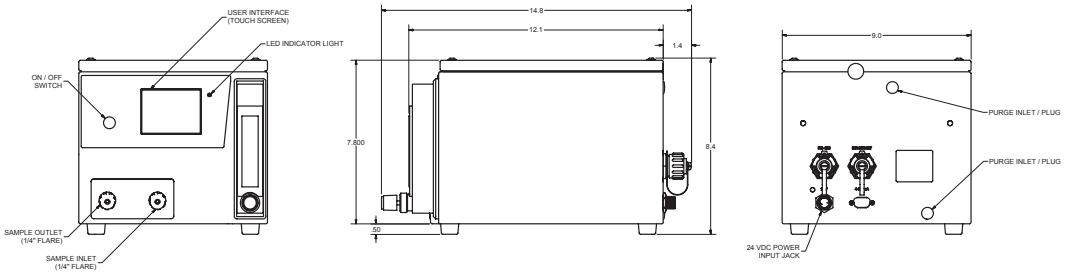

	Vertex100
Features	
Size Range	100 - 500 nm
Channels	2 or 4
Standard Channel Sizes	100 nm, 200 nm, 300 nm, 500 nm
Flow Rate	100 mL/min
Sample Volume	5.0 mL/min
Zero Count Level	≤ 20 count/L
Laser Source	Solid state laser
Calibration	NIST traceable
Communication Modes	Ethernet, Serial RS-485, 4-20mA
Data Storage Records	3,000 Records with a Rolling Buffer
Display	TFT color touch screen
Concentration Limit	>100,000 counts/mL @ 10% coincidence loss
Enclosure	316L stainless steel
Sample Inlet/Outlet Connection	1/4" FlaretekTM
Environmental Conditions Operating	50°F to 104°F (10°C to 40°C), 20% to 95% non-condensing
Environmental Conditions Storage	14°F to 122°F (-10°C to 50°C), up to 98% non-condensing
Sample Temperature	50°F to 122°F (10°C to 50°C)
Sample Pressure	7 PSI to 100 PSI (0.5 Bar to 6.9 Bar)
Wetted Surface Materials	Borosilicate glass, Kalrez, PFA, PTFE, PCTFE (Kel-F), quartz, and SS316
Communication Protocol	MODBUS TCP, MODBUS Serial, 4-20mA
Power	External Supply: Rated input 120-240V AC 50/60Hz, 0.7A - 1.4A. Rated Output: 24V DC, 5A
Dimensions	9.0"(w) x 13.4"(d) x 8.4"(h) [22.9 x 34.0 x 21.3 cm]
Weight	12.5 lbs (5.67 kg)

Includes: 24V power adapter, power cord (US/UK/EU/CN), 1.8m USB-RS485 serial cable with industrial connector, 25' Ethernet cable with industrial connector, USB flash drive with Operators Manual, 2 x 10 foot sample inlet and outlet tubes (with flared tips and lock nuts), flow cell cleaning kit, calibration certificate and carrying case.

Optional: Printed operating manual; additional tubing, additional serial or Ethernet cables with industrial connector, flow cell cleaning kit.

Distributed by:

MADE IN USA

Scan to Learn More